



# Slimline Roof Mount Solar Hot Water

Better Performance,  
Better Hot Water

**Capture Australia's unlimited FREE energy source & provide up to 80% of your hot water heating needs.**

iHeat's Slimline roof mount solar hot water heaters are traditional close-coupled thermosiphon systems, combining an aesthetically pleasing low-profile tank, with double insulated solar collectors, which makes iHeat Australia's choice for energy efficient hot water heating.

The Slimline range includes both open loop & closed loop models, with flexible installation options & attract the some of the highest government incentives available.



## Slimline open & closed loop

iHeat's Slimline open loop range is perfectly paired to warmer climates. Direct heating transfer from the collector to the tank provides maximum efficiency. iHeat's double insulated, all copper collector provides maximum efficiency for even the largest hot water demand.

iHeat's Slimline closed loop is our toughest model yet.

Incorporating advanced heat exchanger technology, overheating protection device & super efficient heat transfer fluid provides maximum solar contribution in the coldest areas of Australia.

The versatile design of iHeat Slimline Closed Loop range allows installation in poor water quality areas and remote locations. No need for electrical pumps & can be connected to alternate energy sources = the perfect off-grid solution.



© Copyright iHeat 2018

ISO9001 System Certification

iHeat Australia, the manufacturer of iHeat hot water systems, is a fully certified company



## 6 star energy efficient gas booster


Gas Booster	20L	26L
Height	520mm	542mm
Width	350mm	350mm
Weight	14kG	17kG
Gas connection	20 BSP	20 BSP
Water connection	15 BSP	15 BSP
Ignition	Electronic	Electronic
Voltage	240AC	240AC
Gas Type	Natural Gas / LPG	Natural Gas / LPG



6 STAR ENERGY RATING



Specification for 300L Tank		
System Dimensions	System Length: Tank & Collector	2505mm
	Width of tank	2190mm
	Diameter	555mm
	Weight of tank	100kg

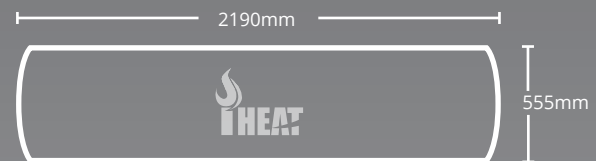

Specification for 200L Tank		
System Dimensions	System Length: Tank & Collector	2505mm
	Width of tank	1540mm
	Diameter	555mm
	Weight of tank	75kg



Warranty Information	
Tanks & Collectors	5 yr parts and labour
Electrical & Parts	1 yr parts and labour
Gas Booster	10 yr heat exchanger parts
	3 yr parts and labour



### WaterMark

iHeat water heaters have Watermark approval to the Australian Standards meeting the requirements for installation into the reticulated water supply.



### Regulatory Compliance Mark

iHeat water heaters, electric boosted solar water heaters and heat pump water heaters bear the Regulatory Compliance Mark.

